Surface Mounted SHI Power Track



eubiq

www.eubiq-europe.com



The SH power track is designed for both domestic and office environments, it has a compartment for data cables and also has a groove on the bottom to clip in hooks and bars for utensils.
The versatility of the SH track makes it an ideal way to arrange your electrical outlets.

Technical details

Installation : Surface mounted


Connection : 1 end terminal on each side
Two tracks can be link.

Cutting : the various lengths can be shortened by up to 9 cm, implying the removal of the RJ45 slots.

Material :
Track: Aluminium
Finish: Brushed Aluminium or Brushed Black

Weight and dimensions
Weight: 2.1 kg (per metre)
Dimensions: 10 cm x 2.85 cm (Height x Depth)
Length: 60, 80, 100, 120 cm


Electric
Voltage: 220 Volts
Intensity: 32 Ampères
Frequency: 50/60 Hertz
Protection: IP4X

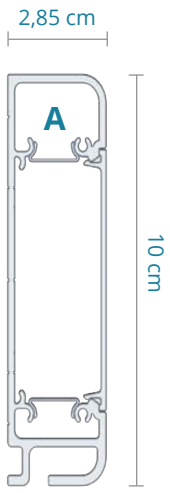

Number of cables per compartment

	Cable type	Size	Capacity compartment A
Network Cables	Cat. 5E UTP	Dia. 5.5 mm	5
	Cat. 5E STP	Dia. 6.0 mm	4
	Cat. 6 UTP	Dia. 6.5 mm	4
	Cat. 6 STP	Dia. 7.0 mm	3

Finishes: Brushed Black or Brushed Aluminium

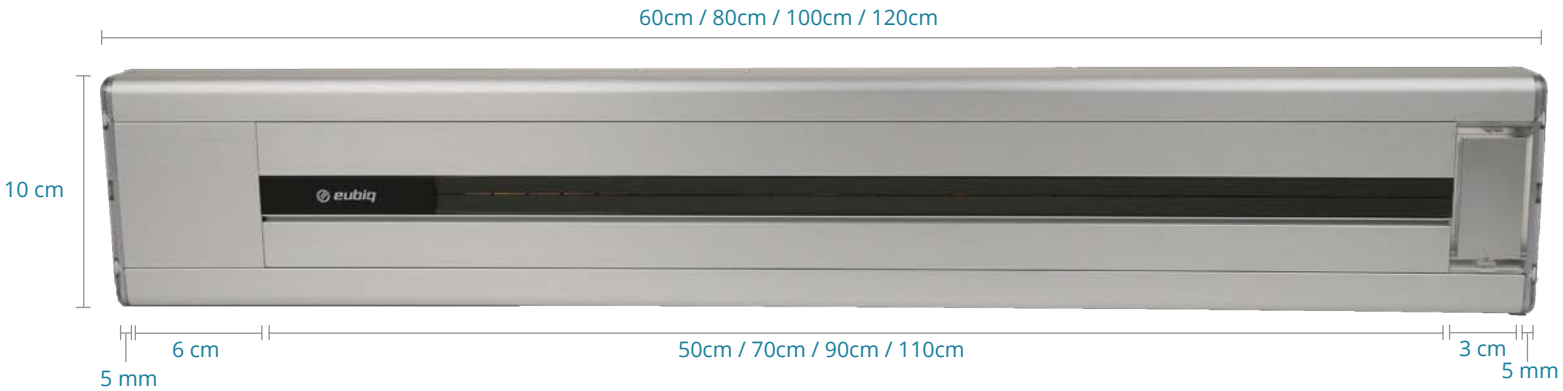






	Reference	Maximum number of adapters*	Nombre maximum de RJ45
ALUMINIUM			
SH1 Power track - 60 cm	1011-0807-0106	5	3
SH1 Power track - 80 cm	1011-0807-0108	8	3
SH1 Power track - 100 cm	1011-0807-0110	10	3
SH1 Power track - 120 cm	1011-0807-0112	13	3
BLACK			
SH1 Power track - 60 cm	1011-0804-0106	5	3
SH1 Power track - 80 cm	1011-0804-0108	8	3
SH1 Power track - 100 cm	1011-0804-0110	10	3
SH1 Power track - 120 cm	1011-0804-0112	13	3

Composition of a track



Composition of a track


1



Article: SH housing

Description: SH housing 59 cm, 79 cm, 99 cm, 119 cm cuttable


2

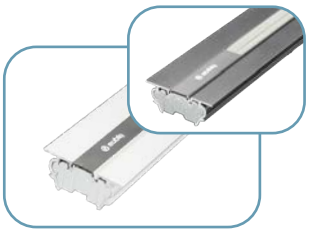

Article: SFC3 Power track

Description: SFC3 power track, non-cuttable 50, 70, 90, 110 cm


3

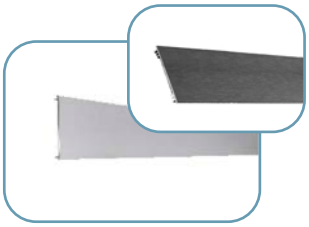

Article: Shutter, neutral faceplate


Description: 9 cm, cuttable (6 cm + 3 cm) can be removed to shorten the SH housing

4

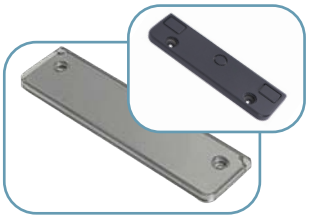


Article: End caps

Description: 2 covers for the ends of the chute (1 cm)

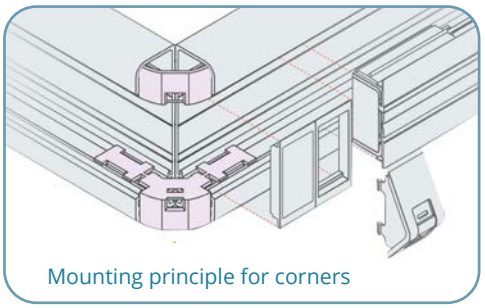


Mounting principle for corners

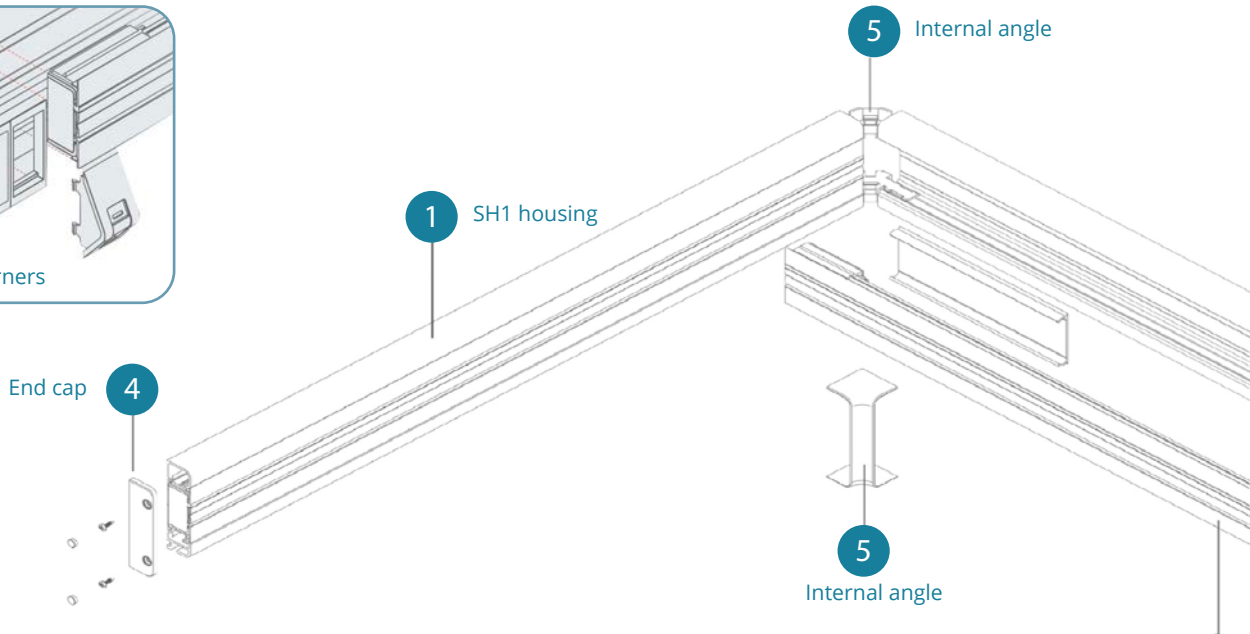

Optional

5

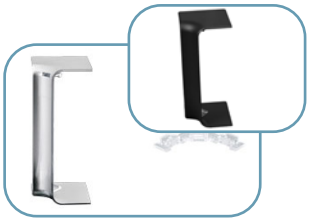

Article: Internal angle
Reference 5011-0404-0500
Description: 90° internal angle, not adjustable

6



Article: DS4 housing
Reference: Aluminium : 3104-0004-0500 Noir : 3104-0002-0500
Description: DS4 housing for RJ45 connector (Width 3 cm)
Core sold separately

7



Article: External angle
Reference: 5011-0504-0500
Description: 270° external angle, non-adjustable

8




Article: Set of 4 hooks
Reference: 3501-0005-0500
Description: 4 hooks to clip under the housing

9





Article: 40 cm side bar
Reference: 3502-0000-0504
Description: Clip-on bar under the trunking Aluminium finish

10

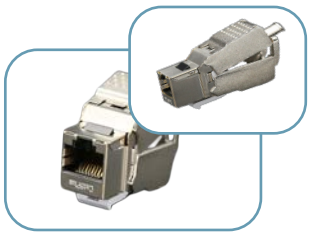

Article: RJ45 core
Reference: 3201-0299-0500
Description: RJ45 Category 6e STP Keystone Jack compatible with DS3 and DS4 box

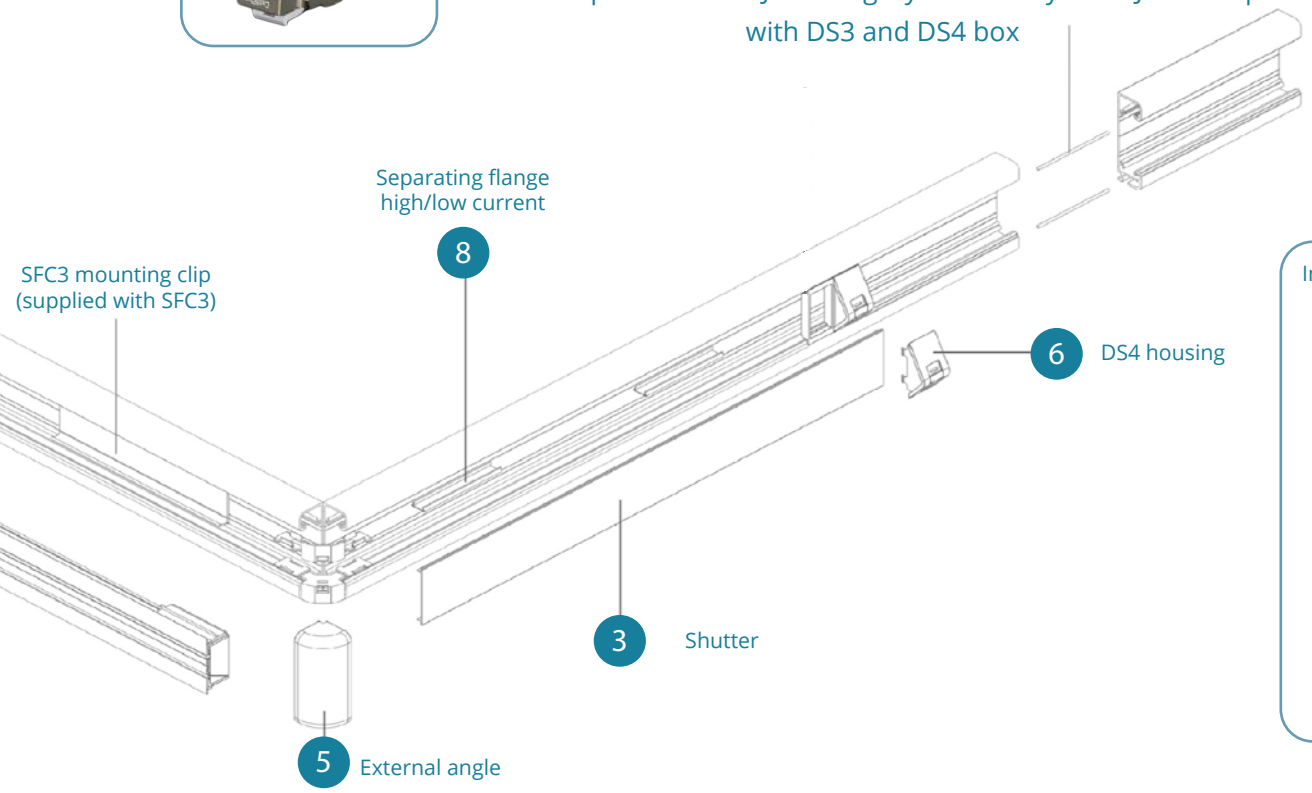

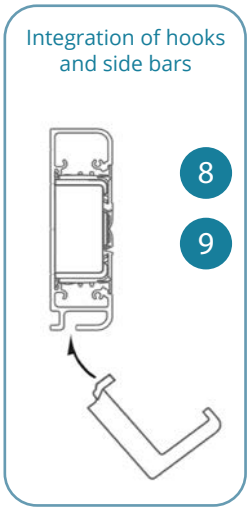

Connection is simple thanks to the quick push-in connectors integrated into the SFC3 power track.



The connector and fixing clips are supplied with the SFC3 power track.





Wiring the quick connector




Insert the quick connector into the SFC3 power track.



Insert the fixing clips into the housing.



Position the SFC3 on the mounting clips.

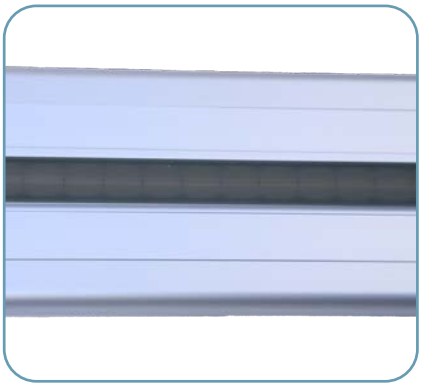

Push the SFC3 firmly into place.

**The power track is easy to wire thanks to the quick connector.
No more complicated than a conventional electrical outlet.**



eubiq

www.eubiq-europe.com